

4

3


2

1

TONKAFLO® Pumps SERIES AS40400

FLOW RANGE-175 TO 420 GPM HEAD RANGE - 27 TO 394 PSI
STAINLESS STEEL STAGED PUMP PERFORMANCE CURVES - 2960 RPM

CUSTOMER _____ 50 Hz
MODEL _____

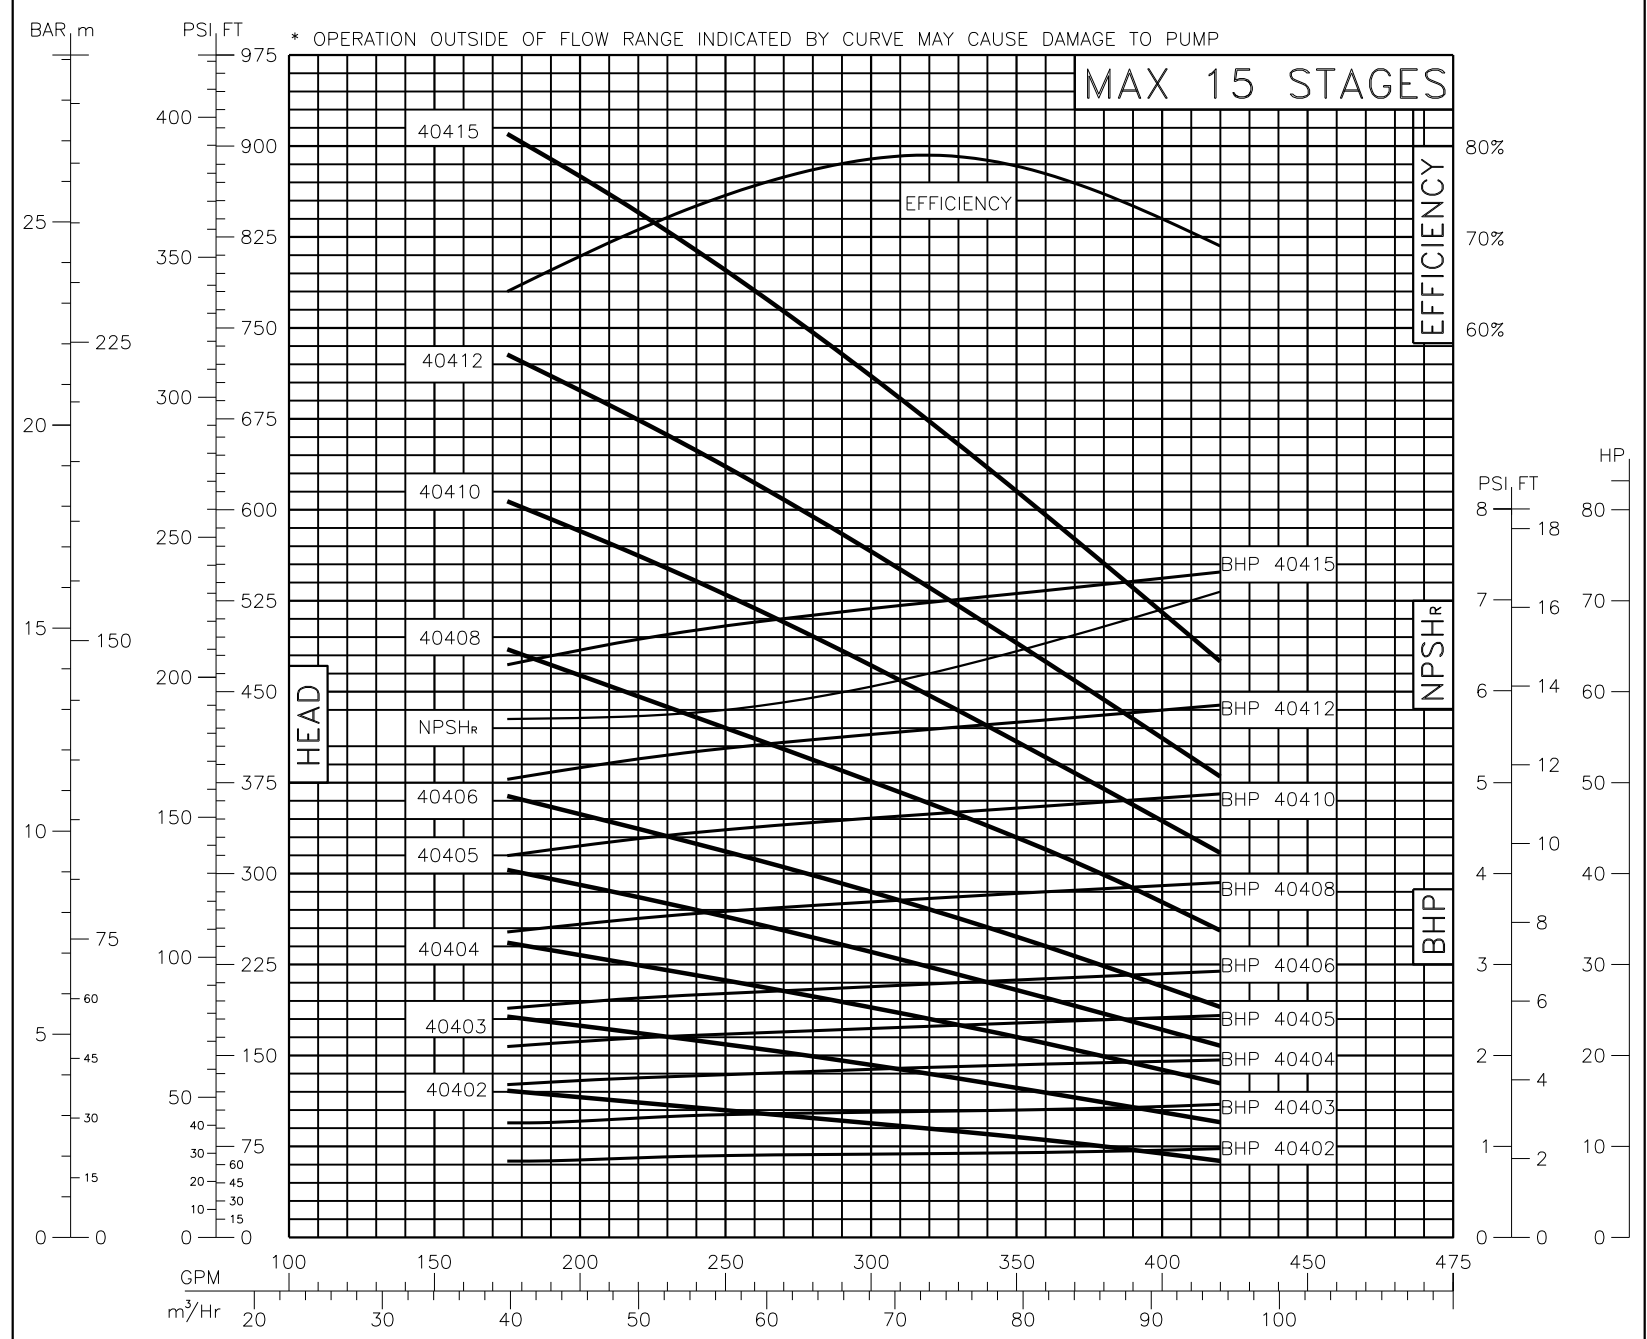


NOTES:
 1. BHP CURVES INDICATE HP REQUIREMENT AT THE PUMP SHAFT WHICH INCLUDES BEARING FRAME. MOTOR HP = BHP/MOTOR EFFICIENCY.
 2. FOR SIZES OTHER THAN THE STANDARD PUBLISHED, PLEASE CONSULT FACTORY.
 3. OPERATING ABOVE OR BELOW THE SPECIFIED RANGE COULD DAMAGE THE PUMP.

P/N 1225758 Rev E

VEOLIA 5951 Clearwater Drive Minnetonka, MN 55343-8995 USA • Phone 1-866-439-2837 • Fax 952-988-6060
 • <http://www.watertechnologies.com>

E	SUEZ REBRANDING	131562	TG	SR	MS	19 Oct 18	TOLERANCES UNLESS NOTED
E1	SUEZ REBRANDING	131562	TG				DECIMALS
D	CURVE REDRAW	15096	AK	BRB	MG	01 Aug 12	ANGLES
C	REVISED BAR SCALE	9459	PFM	MJT	-	30 Dec 04	FRAC
B	REVISED FOR PUMP TOOL	5724	PFM	-	-	24 Apr 01	
REV	DESCRIPTION	ECO	DWN	APPR	APPR	DATE	



CUSTOMER INFORMATION

DWG,TF,PRFM CURVES,AS40000
 4" & 6" INL, 50 HZ

DRAWING NUMBER				REVISION
1202833				E
REF.:-	DOC. OWNER:	SCALE	SIZE	SHEET
PROJECT NO.	PART/MATERIAL NO.	1:1	C	1 OF 1
	1225758			

4

3

2

1

FILE LOCATION: C:\pump\veolia\systems\46\16\1\2000\01_1202833.dwg